


ADVS

**High Volume
Non-Clogging**

**Solid Pass
33~55mm**


Liquid temperature: 0°C to
40 °C/ +32°F to +104 °F
HP range: 1 HP to 5 HP /
0.75 kW to 3.7 kW
pH: 6 to 8
Rated Speed: 2900/3450rpm
Protection class: IP68
Maximum depth: 8M

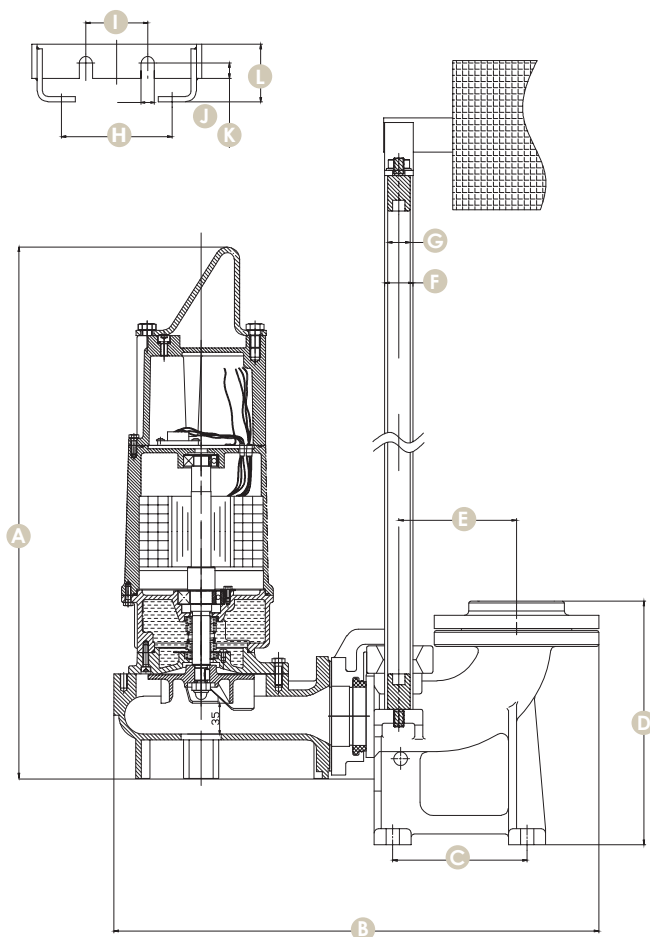


Dimension

Unit:mm

Model	A	B	C	D	E	F	G	H	I	J	K	L
50ADVS5.75	400	271										
50ADVS51.5	625	521	152	275	133	32	25.4	125	70	15	17.5	65
65ADVS51.5	675	548	152	275	133	32	25.4	125	70	15	17.5	65
80ADVS52.2	770	583	152	275	133	32	25.4	125	70	15	17.5	65
80ADVS53.7	770	583	152	275	133	32	25.4	125	70	15	17.5	65

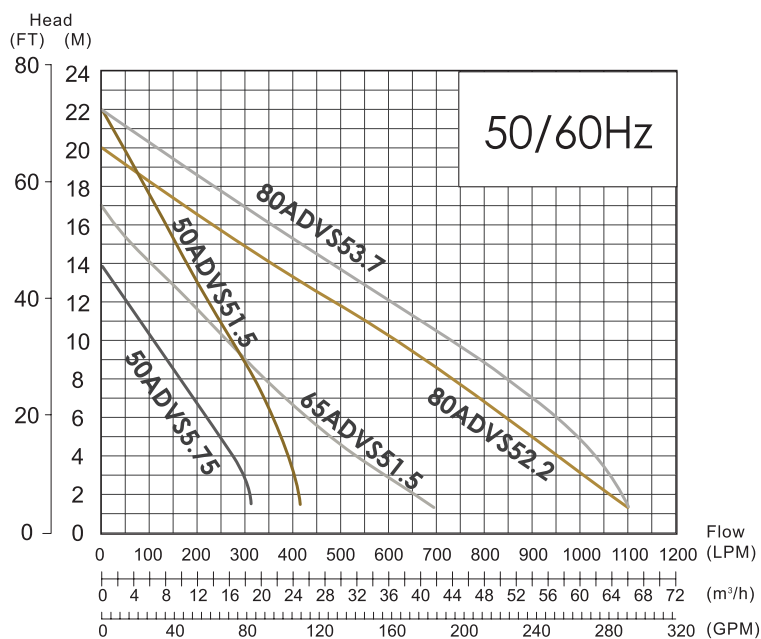

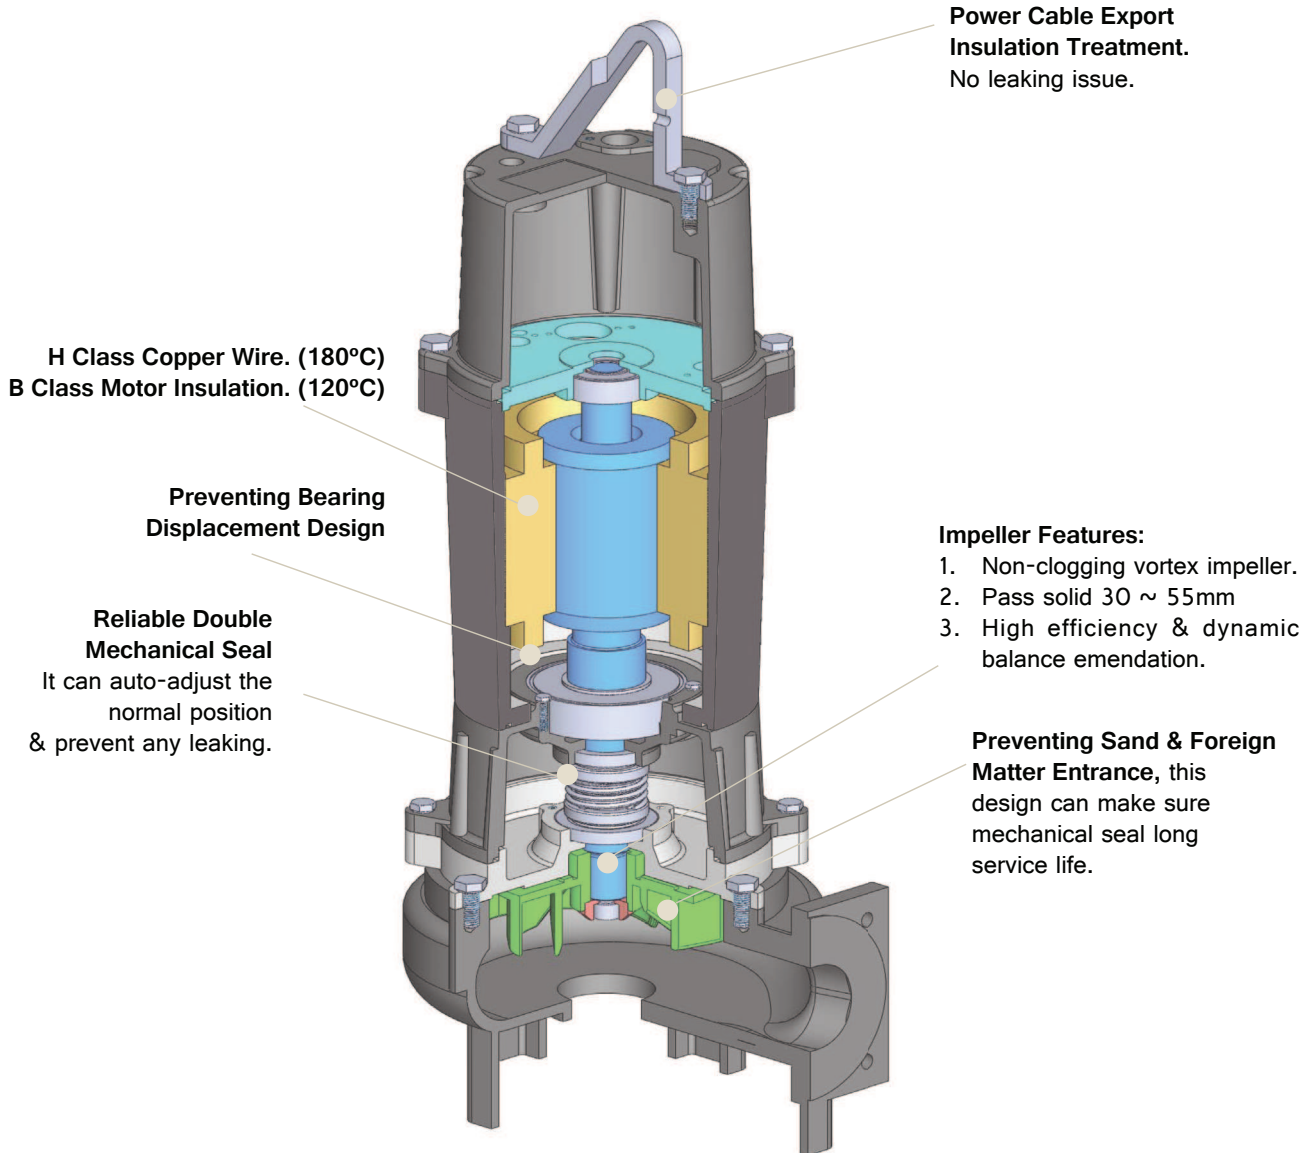

Impeller Design



Slide kits are available for easy removal and reinstallation

Specifications

Model No.	Output		Outlet		Solid Pass	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension	Weight
	HP	kW	mm	inch	Dia(mm)		3M	6M	9M	12M	15M		L x W x H(mm)	Kg
50ADVS5.75	1	0.75	50	2"	33	320	300	230	140	55	-	14	271 x 218 x 400	21
50ADVS51.5	2	1.5	50	2"	31	420	415	360	300	228	156	22	271 x 218 x 443	30
65ADVS51.5	2	1.5	65	2.5"	45	700	580	400	300	180	65	17	398 x 244 x 600	46
80ADVS52.2	3	2.2	80	3"	50	1100	1000	850	680	480	290	20	449 x 281 x 723	64
80ADVS53.7	5	3.7	80	3"	55	1100	1060	960	800	600	420	22	449 x 281 x 723	68