


BAH

**High Head
Non-Clogging**

**Solids Pass
8mm
2 Stages**


Liquid temperature: 0°C to
40°C/ +32°F to +104 °F
HP range: 1/2 HP to 1 HP /
400 W to 750 W
pH: 6 to 8
Rated Speed: 2900/3450rpm
Protection class: IP68
Maximum depth: 8M

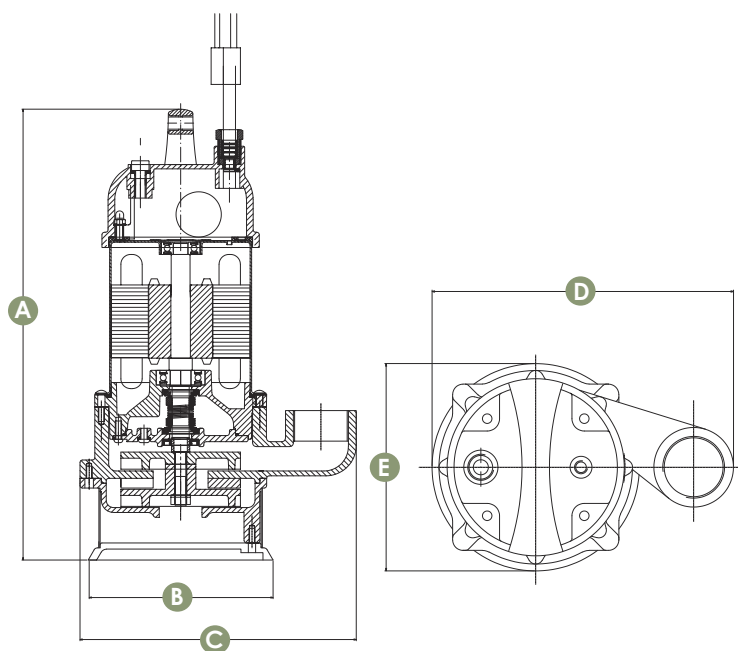

Dimension

Unit:mm

Model	A	B	C	D	E
BAH-400	369	141	227	220	151
BAH-750	474	165	245	233	170

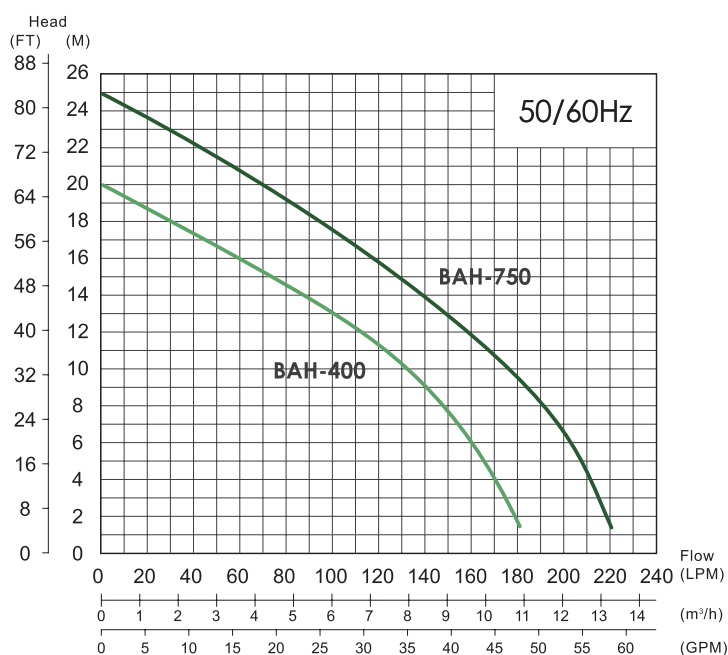

Power Cable Export Insulation Treatment. No water leaking.

Pump is special designed for dirty -water high head usage & transfer dirty water.


Motor B Class Insulation, long service life.

The Fixed Bearing ensures the steady water transferring.

Double Impellers & High Head Design.

Open Impellers . No blocking.

Can Handle Pass Solid under 8mm **Soft Body.**

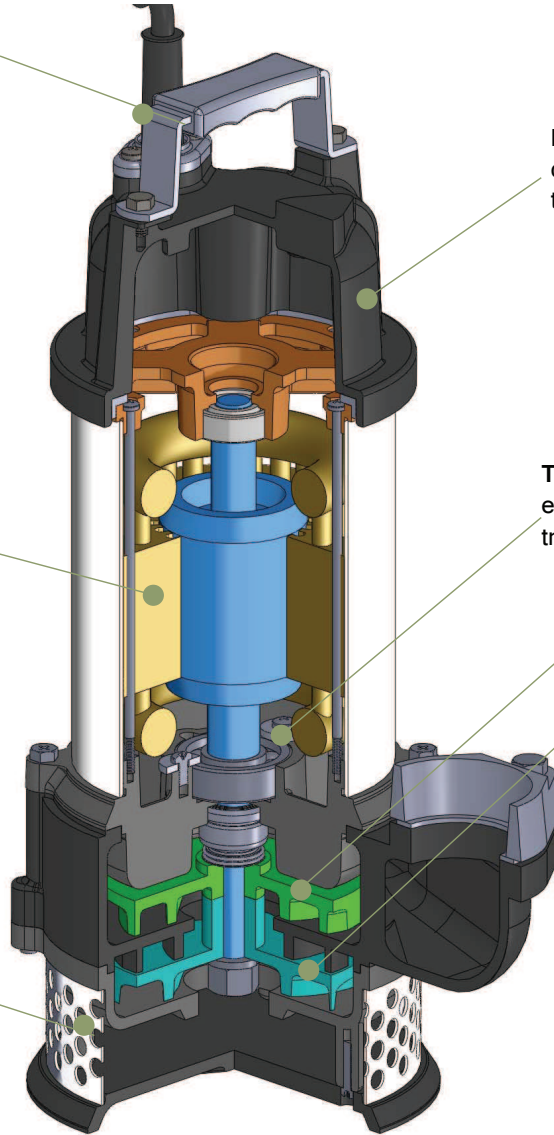

Upper Impeller

Lower Impeller

Specifications

Model No.	Output		Outlet		Solid Pass	Max	LPM Flow @ Head					Max	Dimension	Weight
	HP	W	mm	inch	Dia(mm)	Flow(LPM)	3M	6M	9M	12M	15M	Head(M)	L x W x H(mm)	Kg
BAH-400	1/2	400	32	1-1/4"	8	180	175	160	140	115	75	20	227 x 141 x 369	16
BAH-750	1	750	50	2"	8	220	215	200	185	160	130	25	245 x 165 x 474	17