


DSP

Submersible Sewage Pump

DSPK

Cutter Pump


Liquid temperature: 0°C to 40°C/ +32°F to +104 °F
 HP range: 1HP to 15 HP / 0.75 kW to 11 kW
 pH: 6 to 8
 Rated Speed: 2900/3450rpm
 Protection class: IP68
 Maximum depth: 8M

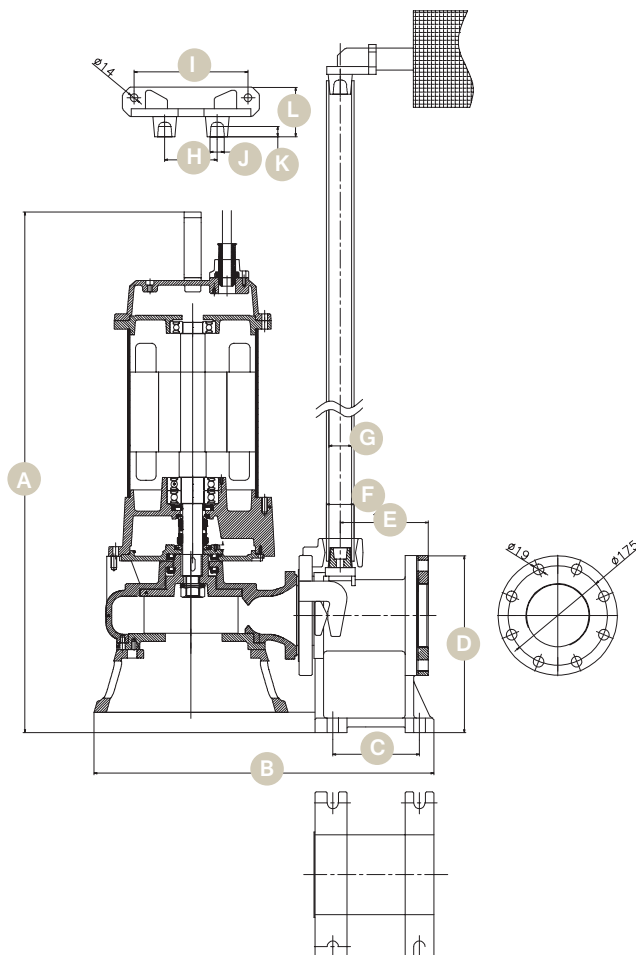


Dimension

Unit:mm

Inch	Model	A	B	C	D	E	F	G	H	I	J	K	L
2"	DSP-10	496	546	152	275	133	32	25.4	125	70	15	17.5	65
	DSP-20	673	631	230	366	202	32	25.4	125	70	15	17.5	65
3"	DSP-30	693	640	230	366	202	32	25.4	125	70	15	17.5	65
4"	DSP-50	740	641	230	366	202	32	25.4	125	70	15	17.5	65
	DSP-75	825	558	152	310	154	48	40	92	200	25	15.5	87
4"	DSP-100	870	561	152	310	154	48	40	92	200	25	15.5	87
	DSP-150	912	596	152	310	154	48	40	92	200	25	15.5	87
	DSP-75	825	558	152	331	280	48	40	92	200	25	15.5	87
6"	DSP-100	870	561	152	331	280	48	40	92	200	25	15.5	87
	DSP-150	912	596	152	331	280	48	40	92	200	25	15.5	87

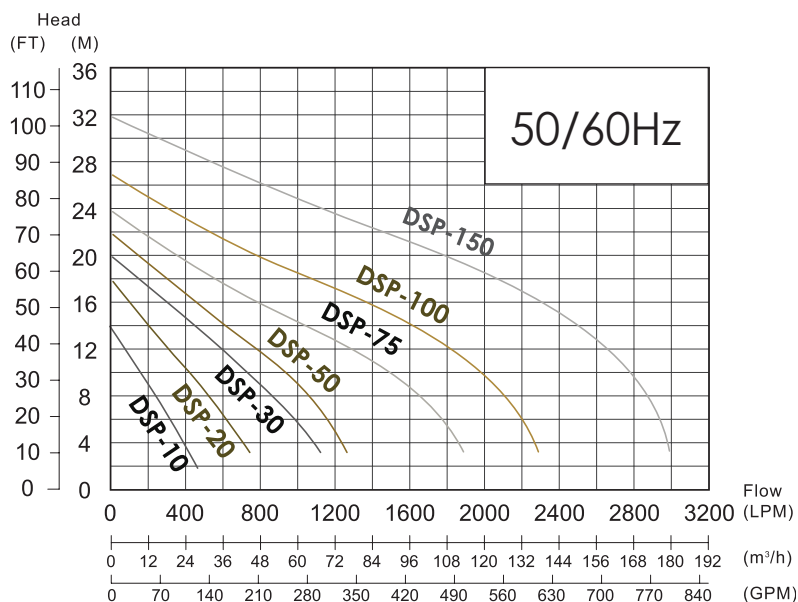

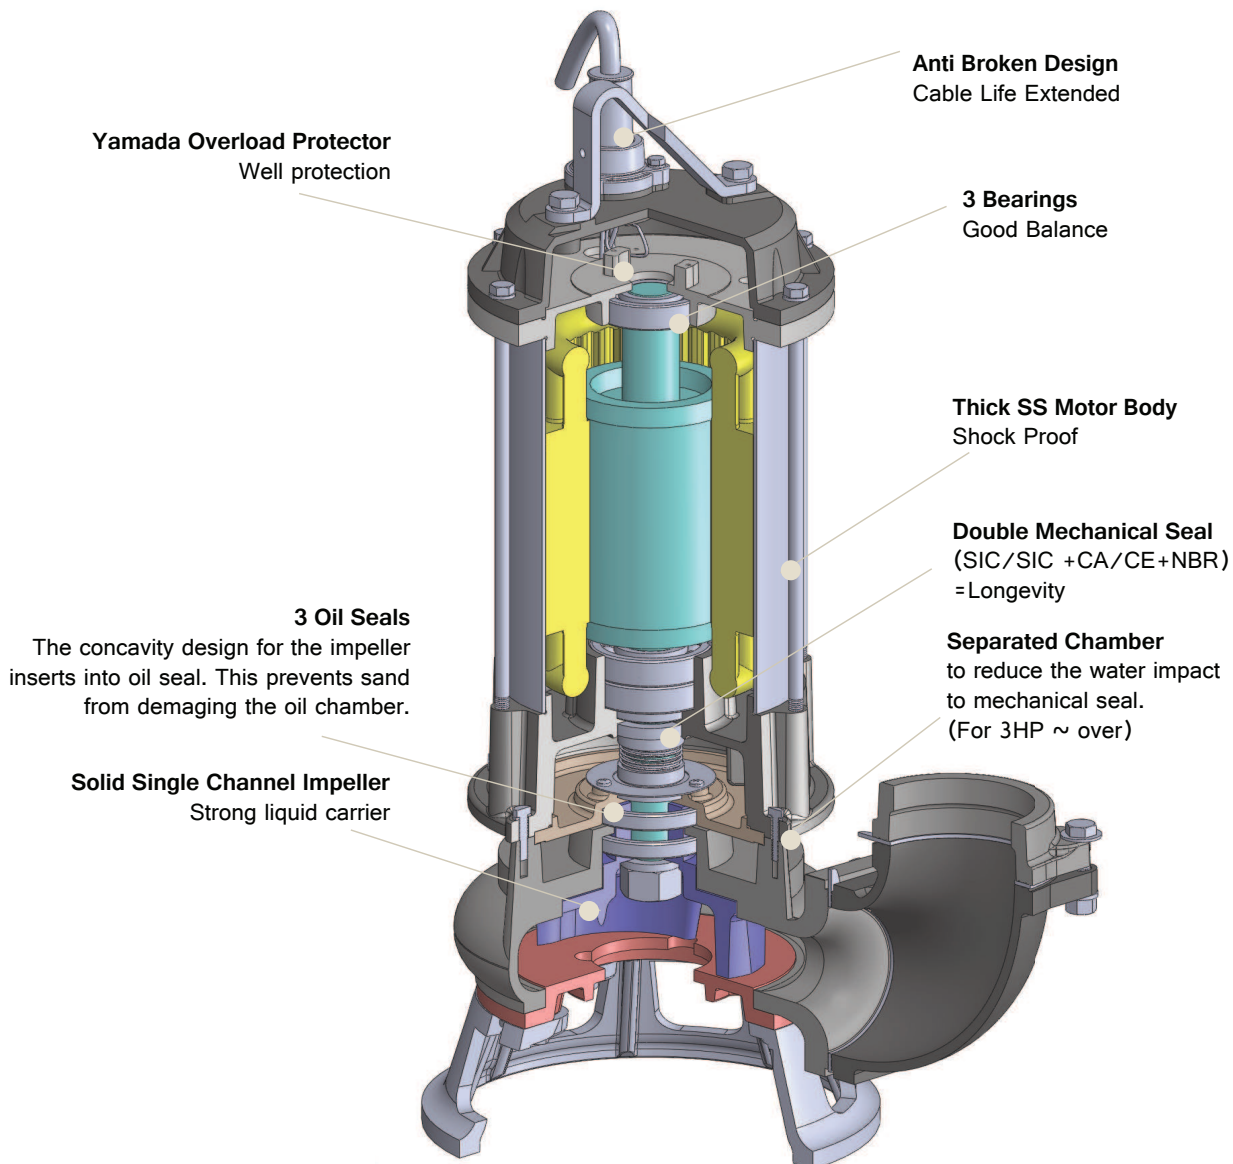

Slide kits are available
for easy removal and
reinstallation



2~5HP



7.5~15HP

Optional cutter impeller for
cutter pump application

Specifications

Model No.	Output		Outlet		Solid Pass Dia(mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H(mm)	Weight Kg
	HP	kW	mm	inch			3M	6M	9M	12M	15M			
DSP-10	1	0.75	50	2"	30	400	370	270	180	60	-	14	250 x 183 x 487	31
DSP-20	2	1.5	80/100	3" / 4"	40	800	750	620	480	310	150	18	400 x 240 x 545	37
DSP-30	3	2.2	80/100	3" / 4"	40	1200	1130	990	800	590	380	20	425 x 220 x 615	55
DSP-50	5	3.7	80/100	3" / 4"	45	1300	1270	1170	1000	790	530	22	425 x 220 x 615	57
							5M	10M	15M	20M	25M			
DSP-75	7.5	5.5	100/150	4" / 6"	50	1900	1840	1500	900	360	-	24	485 x 300 x 735	99
DSP-100	10	7.5	100/150	4" / 6"	65	2300	2260	2000	1500	800	200	27	485 x 300 x 840	109
DSP-150	15	11	100/150	4" / 6"	65	3000	2960	2800	2400	1800	980	32	585 x 340 x 875	149

* Stainless steel impeller --- Optional.

Above 5HP can equip with star delta starter --- Optional.