


JKCH -M

5" Multi-stage Motor-Cooling Design


Liquid temperature: 0°C to
40°C/ +32°F to +104 °F
HP range: 1/2HP to 1.8HP /
400W to 1350W
pH: 6 to 8
Rated Speed: 2900/3450rpm
Protection class: IP68

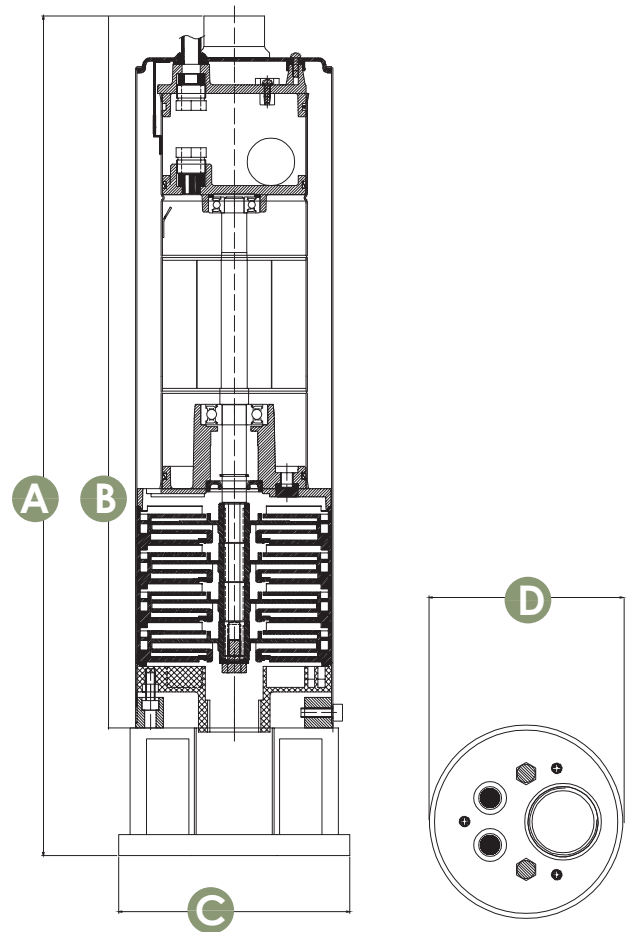


Dimension

Unit:mm

Model	A	B	C	D
JKCH-20M	480	400		
JKCH-30M	505	425		
JKCH-40M	530	450	145	125
JKCH-50M	580	500		
JKCH-60M	605	525		

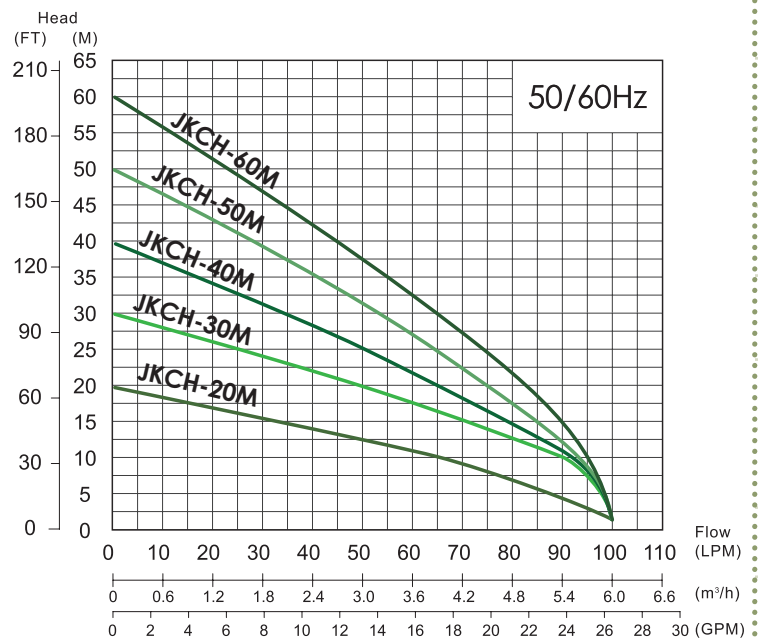

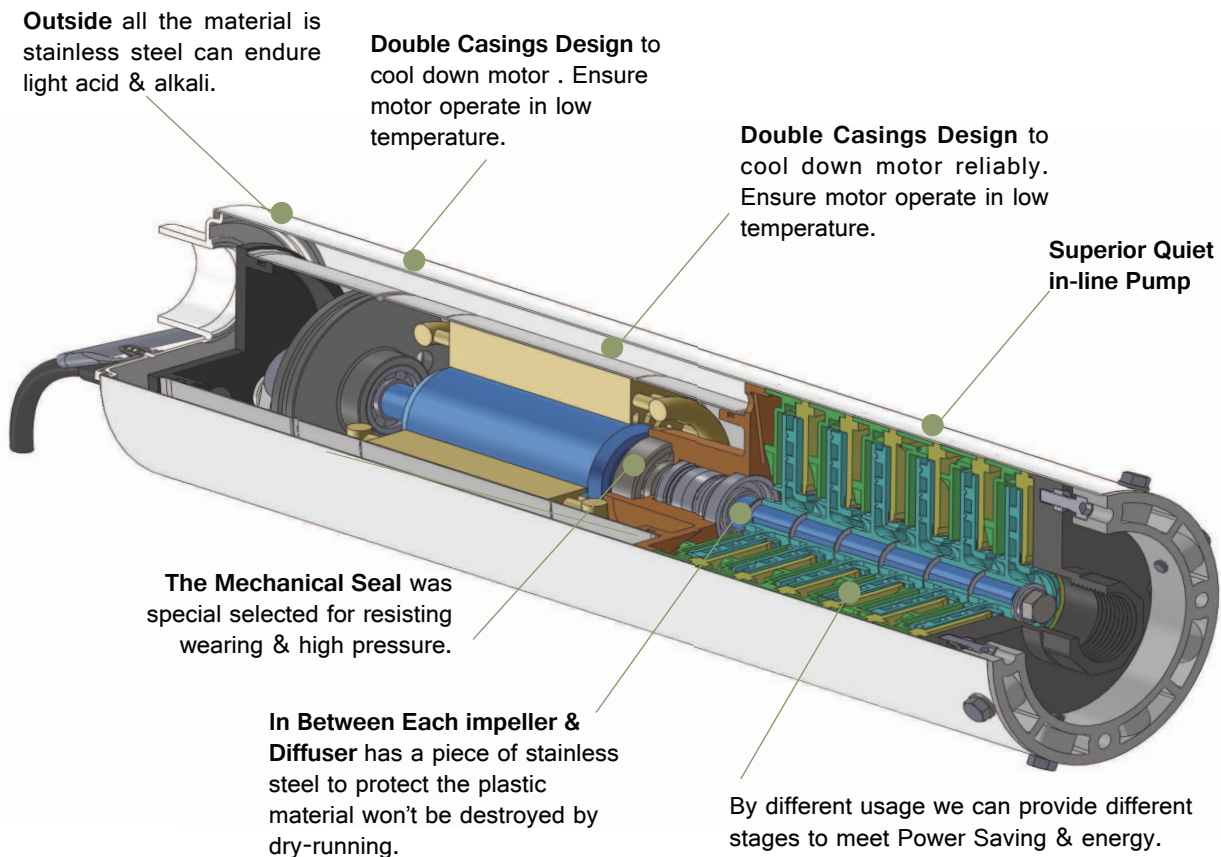

Specifications

Model No.	Output		Stages	Outlet		Solid Pass Dia(mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H(mm)	Weight Kg
	HP	W		mm	inch			5M	10M	20M	30M	40M			
JKCH-20M	1/2	400	2	25	1"	1.2	100	87	65	-	-	-	20	125 x 125 x 400	9
JKCH-30M	3/4	600	3	25	1"	1.2	100	97	90	50	-	-	30	125 x 125 x 425	9
JKCH-40M	1.1	800	4	25	1"	1.2	100	97	92	65	35	-	40	125 x 125 x 450	10
JKCH-50M	1.5	1100	5	25	1"	1.2	100	98	93	75	53	28	50	125 x 125 x 500	11
JKCH-60M	1.8	1350	6	25	1"	1.2	100	98	95	83	65	45	60	125 x 125 x 525	11