


JK

Non-Clogging Vortex Impeller

Solid Pass 30~50mm


Liquid temperature: 0°C to 40 °C / +32°F to +104 °F
 HP range: 1/2 HP to 7.5 HP /
 0.4 kW to 5.5 kW
 pH: 6 to 8
 Rated Speed: 2900/3450rpm
 Protection class: IP68
 Maximum depth: 8M

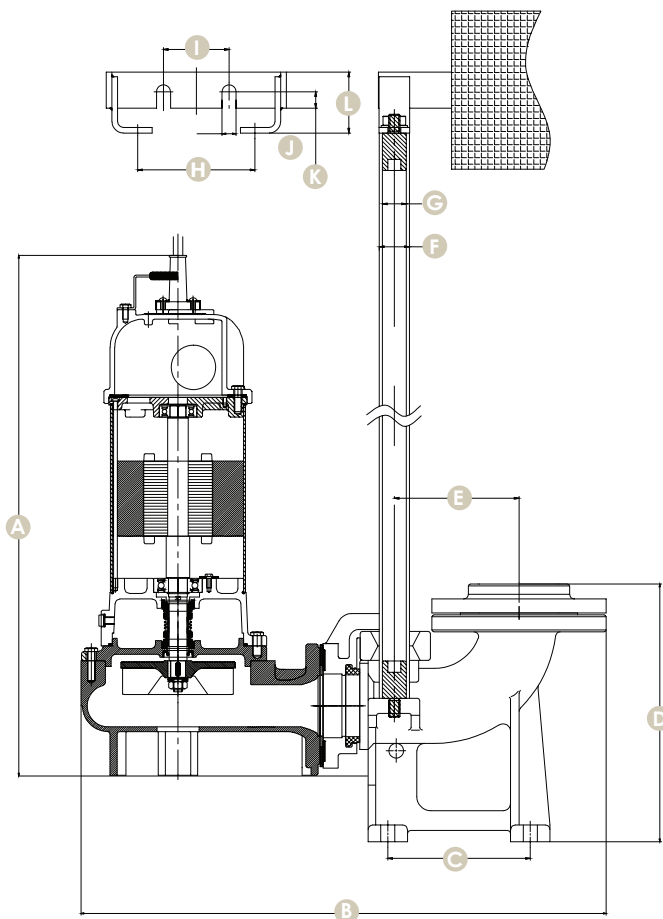


Dimension

Unit:mm

Model	A	B	C	D	E	F	G	H	I	J	K	L
JK-05	355	216										
JK-10	512	489	152	275	133	32	25.4	125	70	15	17.5	65
JK-20	588	557	152	275	133	32	25.4	125	70	15	17.5	65
JK-30	626	560	230	366	202	32	25.4	125	70	15	17.5	65
JK-50	741	680	230	366	202	32	25.4	125	70	15	17.5	65
JK-75	771	680	230	366	202	32	25.4	125	70	15	17.5	65

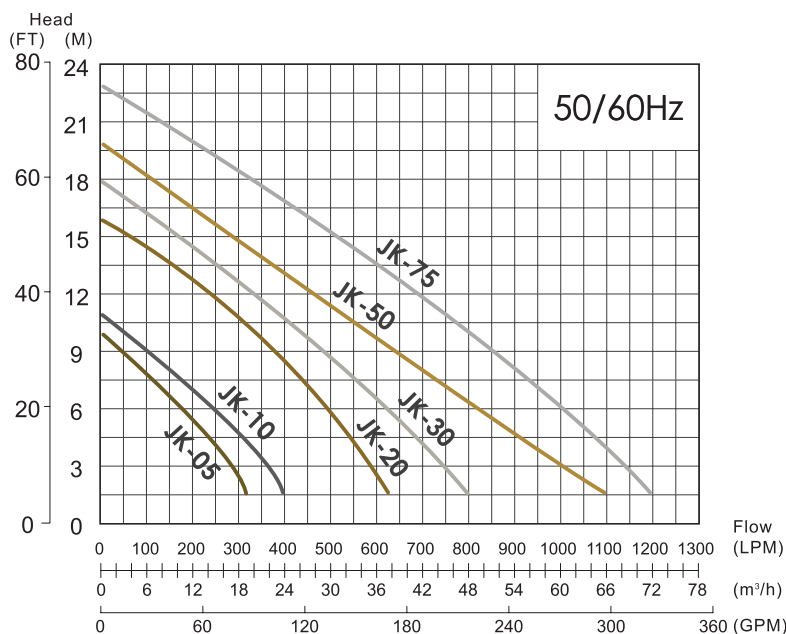

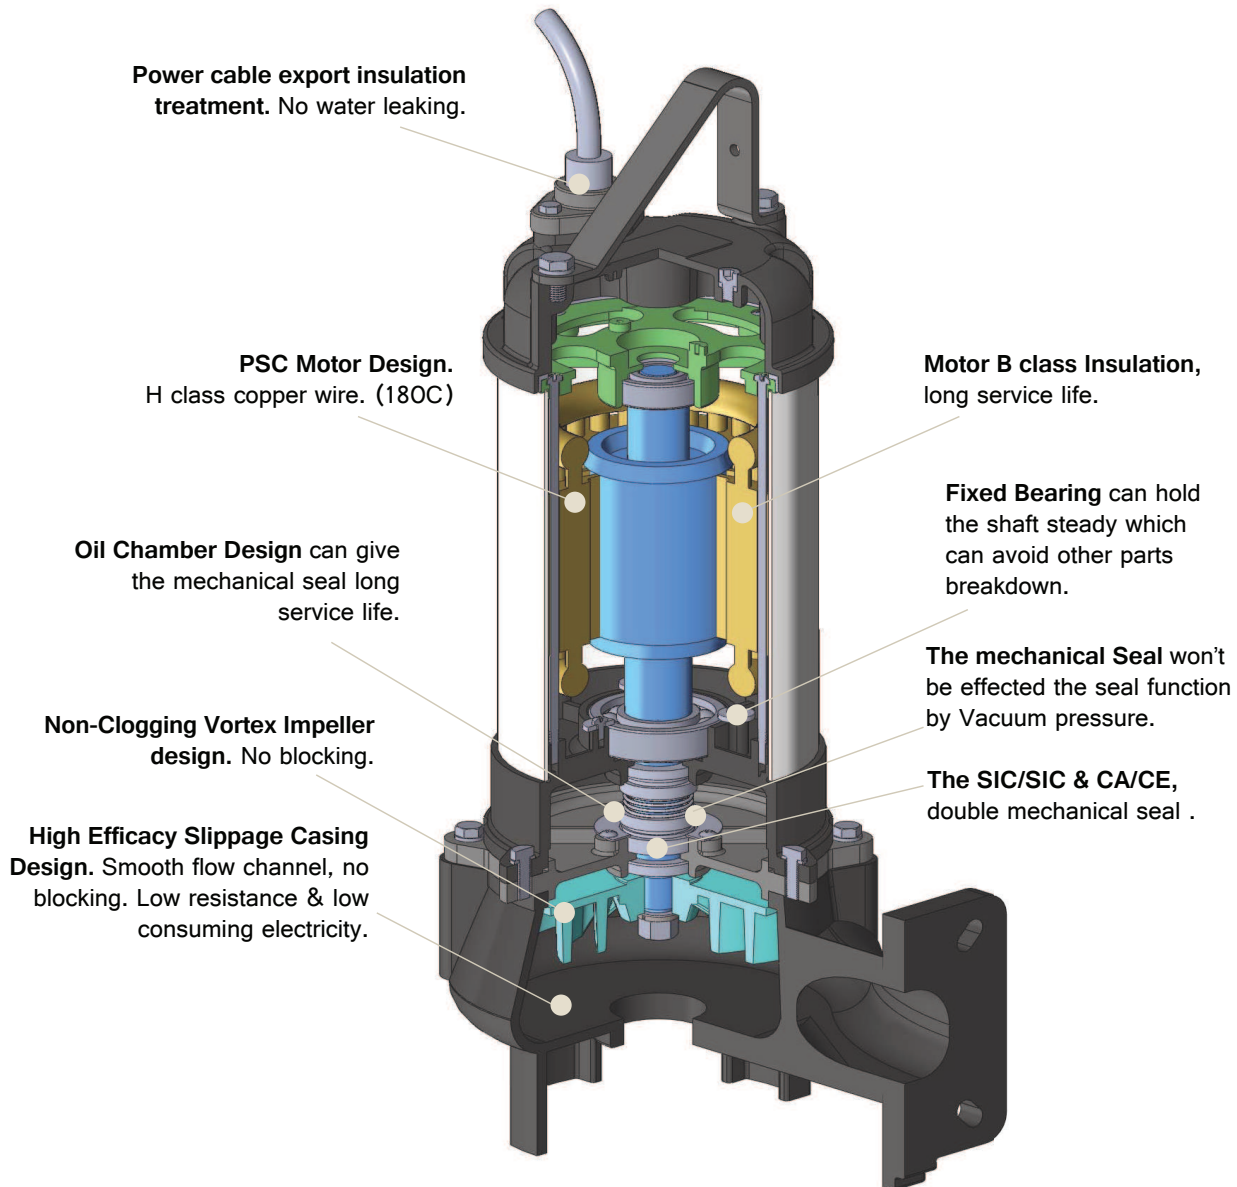

Impeller Design



Slide kits are available for easy removal and reinstallation

Specifications

Model No.	Output		Outlet		Solid Pass	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension	Weight
	HP	kW	mm	inch	Dia(mm)		3M	6M	9M	12M	15M		L x W x H(mm)	
JK-05	1/2	0.4	50	2"	30	320	290	180	50	-	-	10	216 x 127 x 355	14
JK-10	1	0.75	50	2"	30	410	370	250	100	-	-	11	316 x 187 x 441	21
JK-20	2	1.5	80	3"	35	630	590	490	380	240	55	16	385 x 255 x 517	35
							3M	5M	10M	15M	20M			
JK-30	3	2.2	80	3"	35	800	750	670	440	180	-	18	385 x 255 x 555	36
JK-50	5	3.7	100	4"	45	1100	1000	880	590	290	-	20	486 x 290 x 629	55
JK-75	7.5	5.5	100	4"	50	1200	1150	1050	800	520	190	23	419 x 290 x 659	60