


KSV

Non-Clogging Vortex Impeller

Solids Pass 5~20mm


Liquid temperature: 0°C to
40°C/ +32°F to +104 °F
HP range: 1/5 HP to 2 HP /
150 W to 1500 W
pH: 6 to 8
Rated Speed: 2900/3450rpm
Protection class: IP68
Maximum depth: 8M

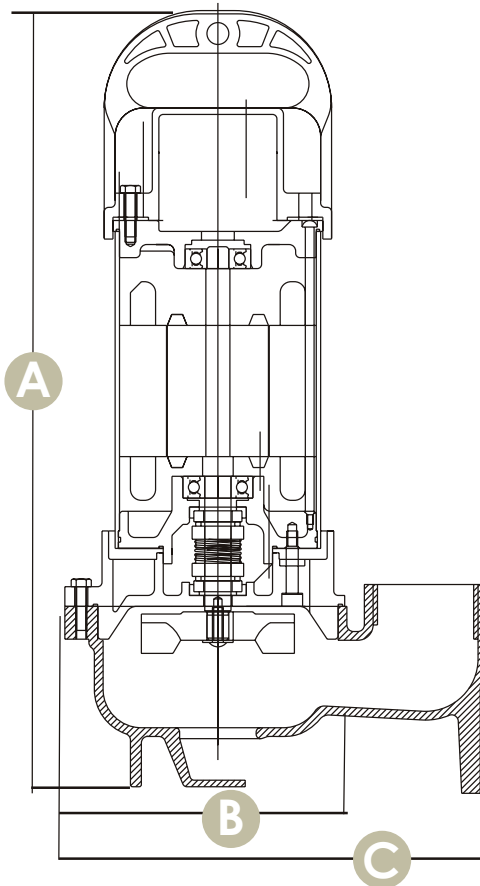


Dimension

Unit:mm

Model	A	B	C
KSV-150	360	140	190
KSV-250	360	140	190
KSV-400	370	155	215
KSV-550	430	160	260
KSV-750	430	160	260
KSV-1500	610	270	350

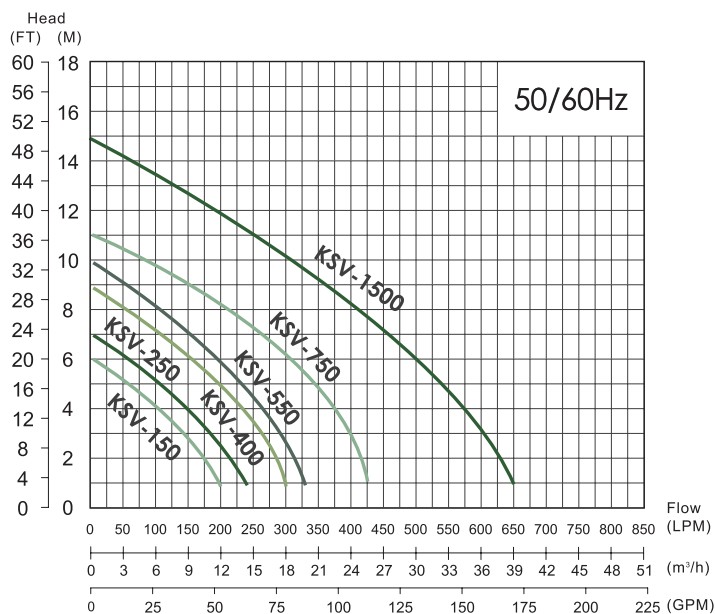

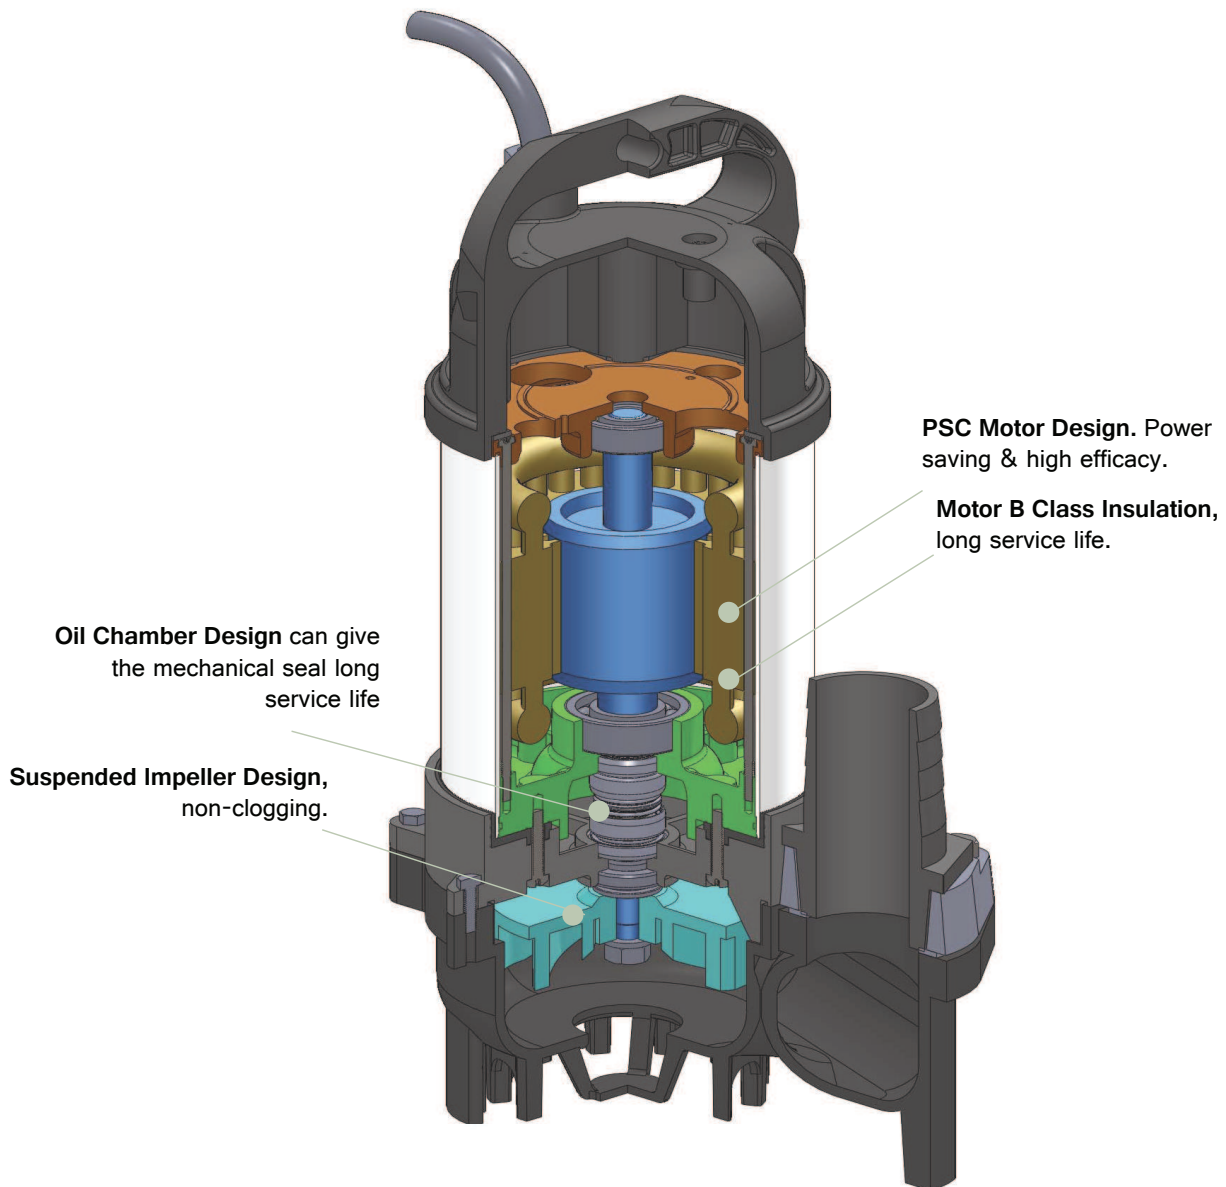

Impeller Design



Bottom Design

Specifications

Model No.	Output		Outlet		Solid Pass Dia(mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H(mm)	Weight Kg
	HP	W	mm	inch			1.5M	3M	4.5M	6M	7.5M			
KSV-150	1/5	150	40	1-1/2"	5	200	190	150	85	-	-	6	190 x 140 x 360	8
KSV-250	1/3	250	40	1-1/2"	5	240	230	185	130	60	-	7	190 x 140 x 360	9
KSV-400	1/2	400	50	2"	10	300	295	270	220	155	70	9	215 x 155 x 370	12
KSV-550	3/4	550	50	2"	15	330	320	290	250	190	120	10	260 x 160 x 430	13
							1.5M	3M	6M	9M	12M			
KSV-750	1	750	80	3"	15	430	420	395	315	150	-	11	260 x 160 x 430	19
KSV-1500	2	1500	80	3"	20	630	620	580	470	340	190	15	350 x 270 x 610	31