

MH

Non-Clogging Vortex Impeller

Large Flow Gardening Pump

24 Hours Operation

Liquid temperature: 0°C to
40°C/ +32°F to +104 °F



HP range: 1/5 HP to 1 HP /
150 W to 750 W

pH: 6 to 8

Rated Speed: 2900/3450rpm

Protection class: IP68



Maximum depth: 8M

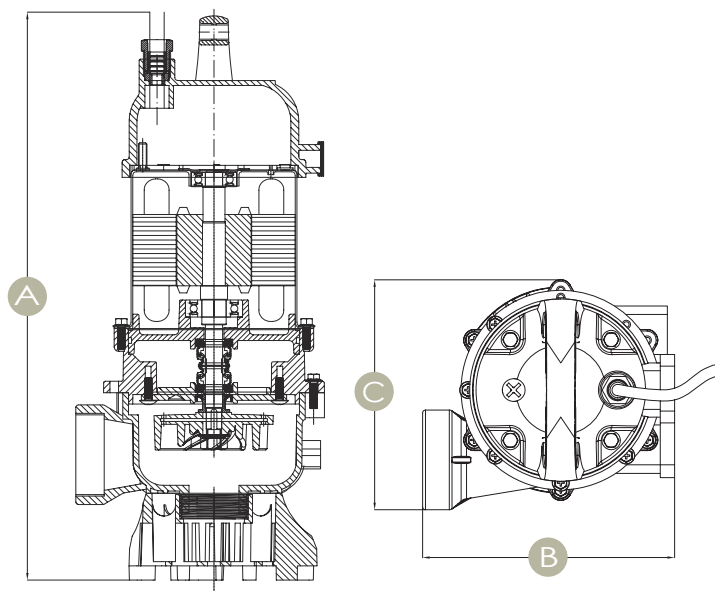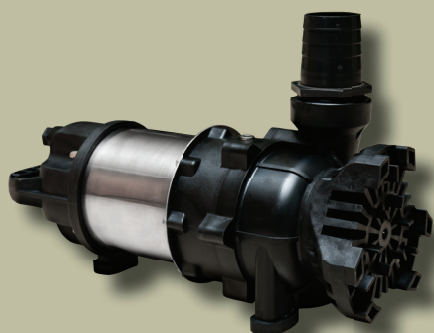


Dimension

Unit:mm

Model	A	B	C
MH-150	379	177	162
MH-250	379	177	162
MH-400	399	177	162
MH-750	414	177	162

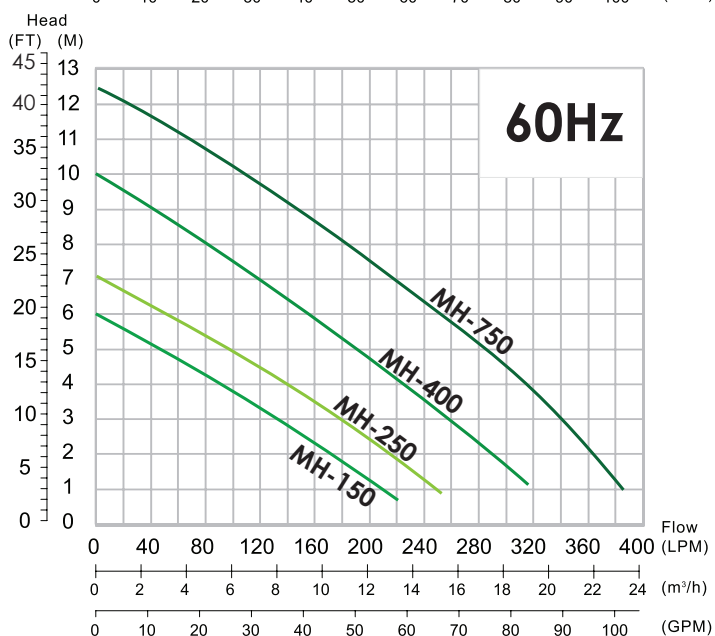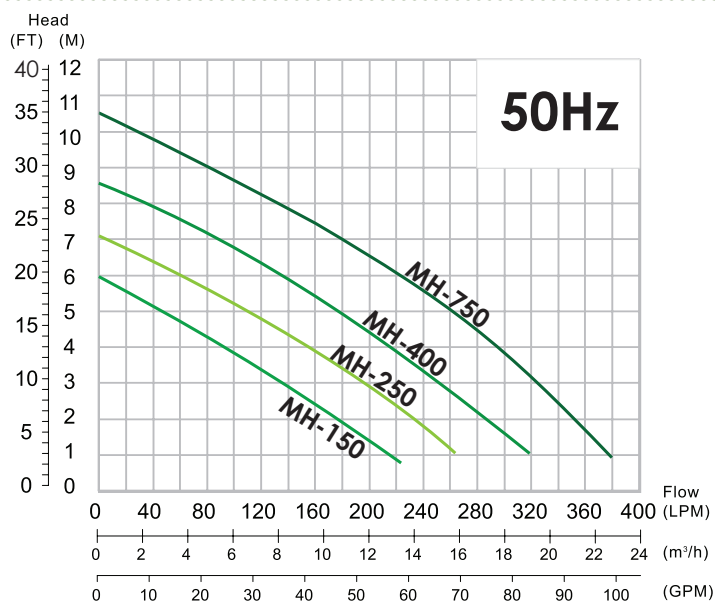

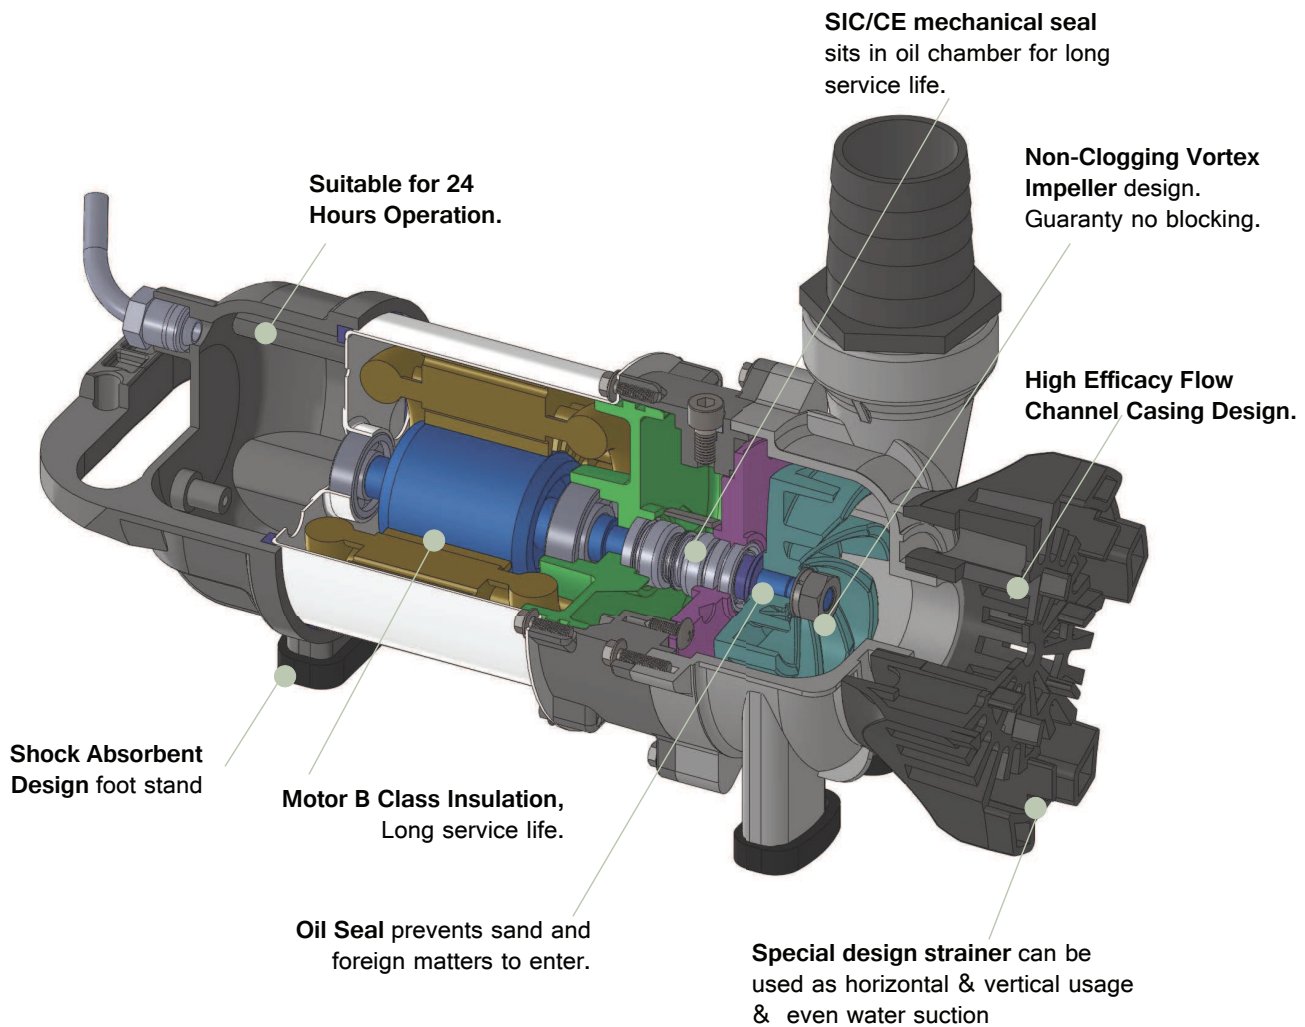

Vertical & horizontal Applications



MH-150/250



MH-400/750

Impeller Design

Specifications

HZ	Model No.	Output		Outlet		Solid Pass Dia(mm)	Max Flow(LPM)	LPM Flow @ Head							Max Head(M)	Dimension	Weight
		HP	W	mm	inch			1.5M	3M	4M	6M	8M	10M	12M		L x W x H(mm)	Kg
50	MH-150	1/5	150	50	2"	6	230	200	150	100	-	-	-	-	6	177 x 162 x 379	7
	MH-250	1/3	250				270	255	190	150	60	-	-	-	7	177 x 162 x 379	7
	MH-400	1/2	400				320	310	255	215	130	25	-	-	8.5	177 x 162 x 399	8
	MH-750	1	750				380	370	330	295	220	125	20	-	10.5	177 x 162 x 414	11
60	MH-150	1/5	150	50	2"	6	230	200	150	100	-	-	-	-	6	177 x 162 x 379	7
	MH-250	1/3	250				250	230	180	135	50	-	-	-	7	177 x 162 x 379	7
	MH-400	1/2	400				320	300	250	215	148	75	-	-	10	177 x 162 x 399	8
	MH-750	1	750				380	370	340	315	255	185	110	30	12.5	177 x 162 x 414	11