


# MP 162/2 two way valve

## A. SOLENOID VALVES



- Directly driven low pressure 2/2 solenoid valves island with two valves,
- high reliability, long life,
- valve can operate in any position,
- designed for air flow,
- differential pressure: 0–0,5 Bar,
- maximum pressure: 2 Bar,
- ambient temperature:  $-20 \div +55 \text{ }^\circ\text{C}$ ,
- fluid temperature:  $-25 \div +90 \text{ }^\circ\text{C}$ ,
- KV factor 5,1 l/min,
- response time: open 5–20 ms,
- sealing: NBR,
- orifice DN 4,5 mm,
- consumption 5 Watt,
- specifications of connector/el. connection: DIN43650, IP65,
- voltage tolerance:  $\pm 10 \%$ .

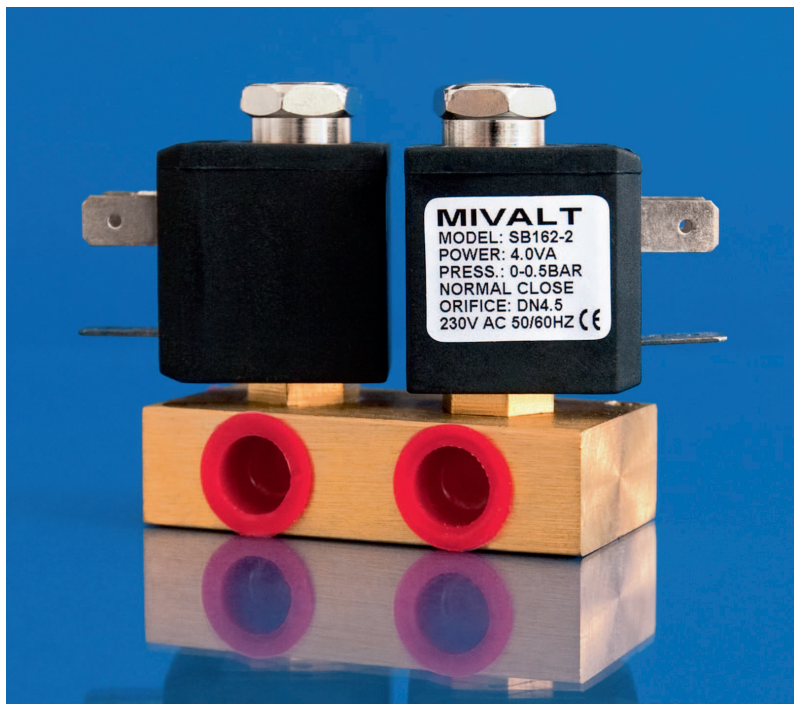