


MP 167

two way valve

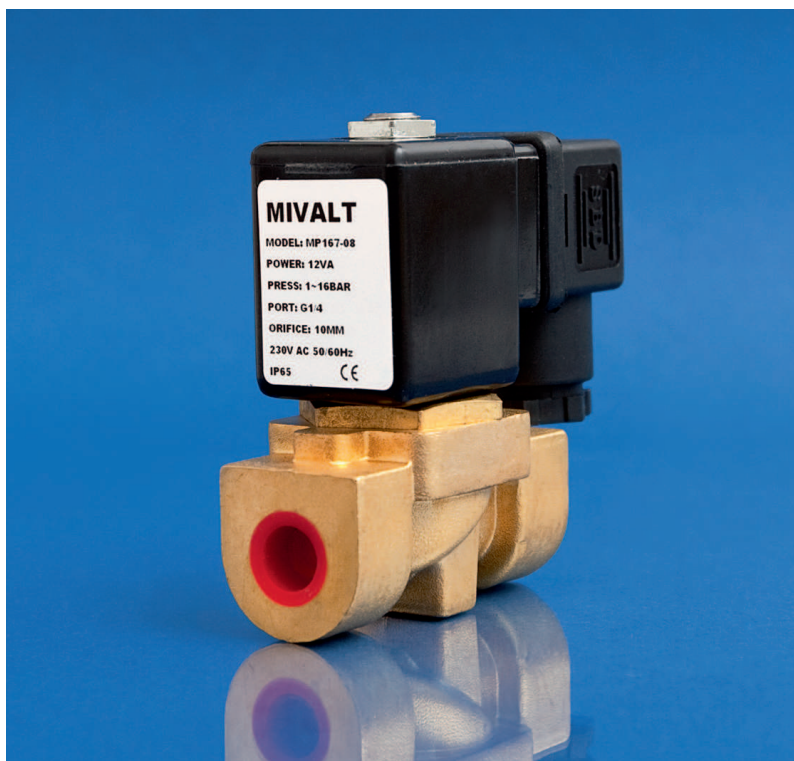

A. SOLENOID VALVES

- Indirectly driven 2/2 valves,
- high reliability, long life,
- medium: air/water,
- working pressure 0,5–16 Bar,
- maximum pressure: 16 Bar (1,6 MPa),
- ambient temperature: $-20 \div +55 \text{ }^{\circ}\text{C}$,
- fluid temperature: $-25 \div +90 \text{ }^{\circ}\text{C}$,
- medium viscosity $< 20 \text{ cSt}$,
- consumption 9 Watt,
- el. connection: ISO4400, IP65,
- voltage tolerance: $\pm 10 \%$.

