


TAS

Non-Clogging Vortex Impeller

Multi-Function Drainage Pump


Liquid temperature: 0°C to
40 °C/ +32 °F to +104 °F
HP range: 1/2 HP to 1 HP /
250 W to 750 W
pH: 6 to 8
Rated Speed: 2900/3450rpm
Protection class: IP68
Maximum depth: 8M

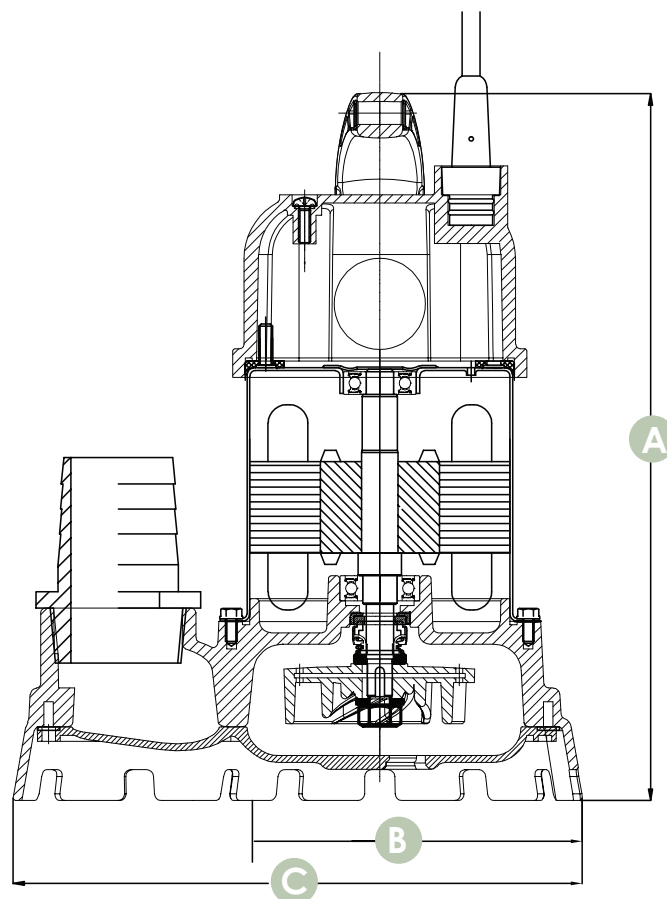


Dimension

Unit:mm

Model	A	B	C
TAS-250	282	145	225
TAS-400	300	162	250
TAS-750	325	162	250

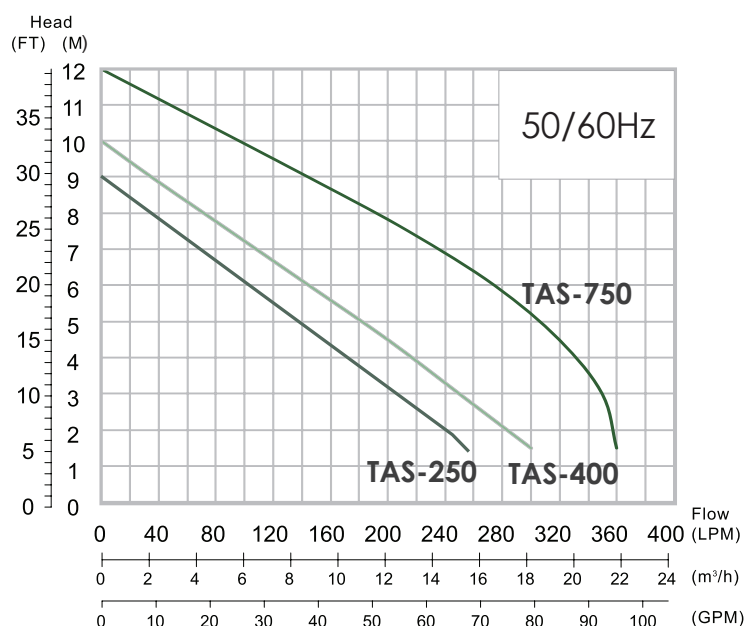

Power Cable Export
Insulation Treatment.
No water leaking.

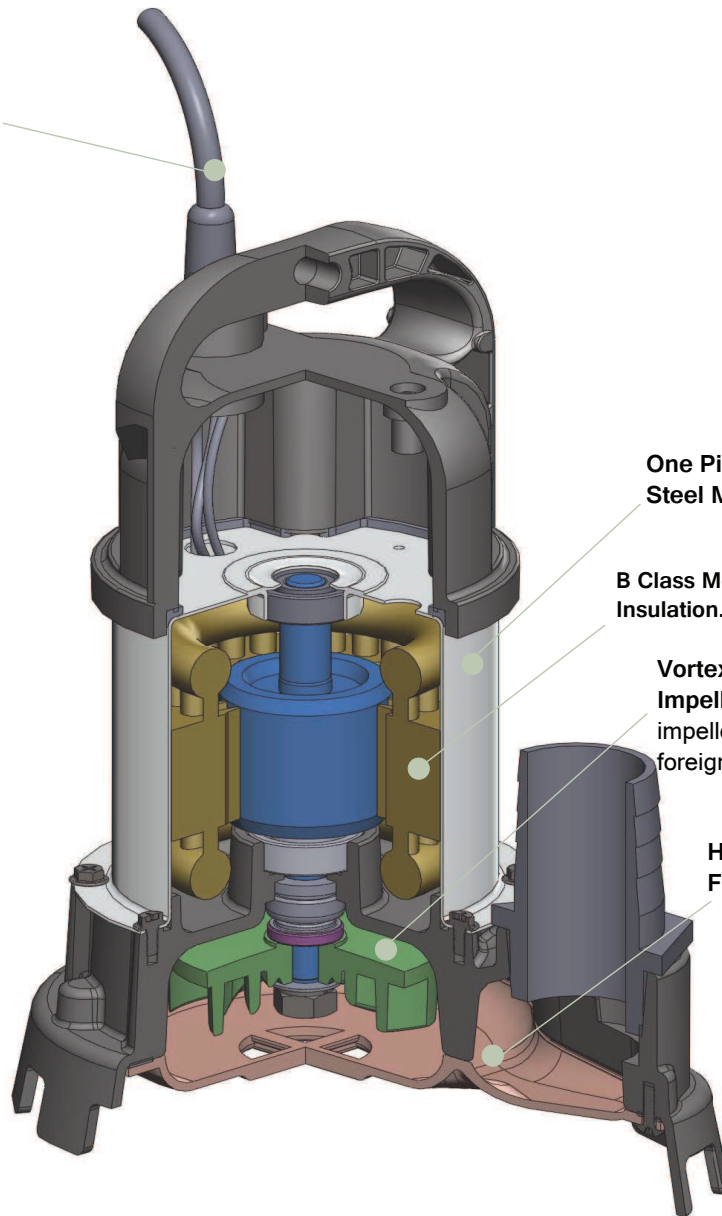


One Piece Stainless
Steel Motor Casing.

B Class Motor
Insulation. (120°C)

Vortex Non-Clogging
Impeller Design. Ensure the
impeller won't be stock by
foreign matters.

High Efficiency Vortex
Flow Channel Design .



Impeller Design



Optional for float
switch or vertical
one

Specifications

Model No.	Output		Outlet		Solid Pass	Max	LPM Flow @ Head					Max	Dimension	Weight
	HP	W	mm	inch	Dia(mm)	Flow(LPM)	3M	4.5M	6M	7.5M	9M	Head(M)	L x W x H(mm)	Kg
TAS-250	1/3	250	40	1.5"	14	250	215	160	105	45	-	9	225 x 145 x 282	8
TAS-400	1/2	400	50	2"	14	300	250	200	145	90	35	10	250 x 162 x 300	9
TAS-750	1	750	50	2"	14	360	350	320	275	215	145	12	250 x 162 x 325	10