


TPS/V -200

**Excellent
Compact Pumps**

**24 Hours
Operations**


Liquid temperature: 0°C to
40°C/ +32°F to +104 °F
HP range: 1/4 HP / 200 W
pH: 6 to 8
Rated Speed: 2900/3450rpm
Protection class: IP68
Maximum depth: 6M


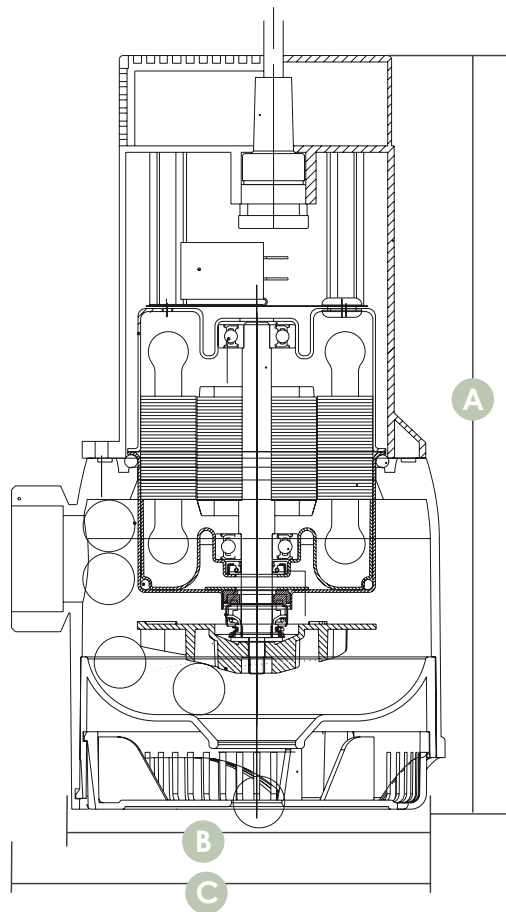


Dimension

Unit:mm

Model	A	B	C
TPS(V)-200	292	145	168

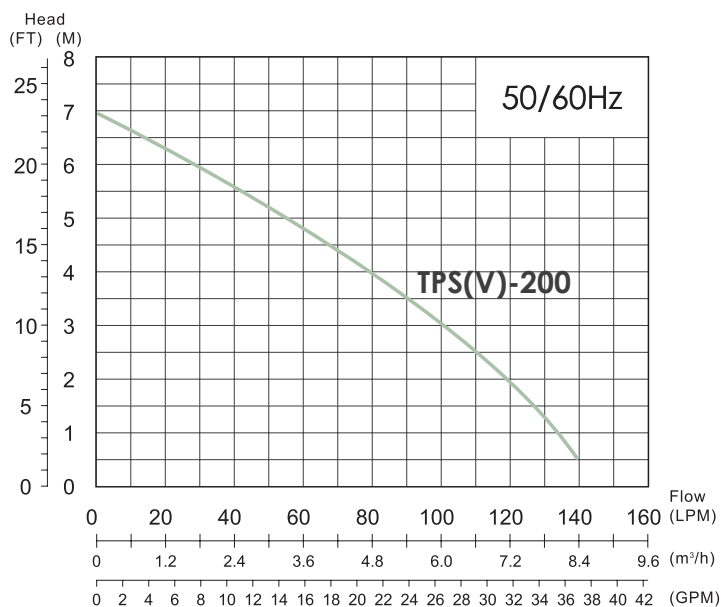

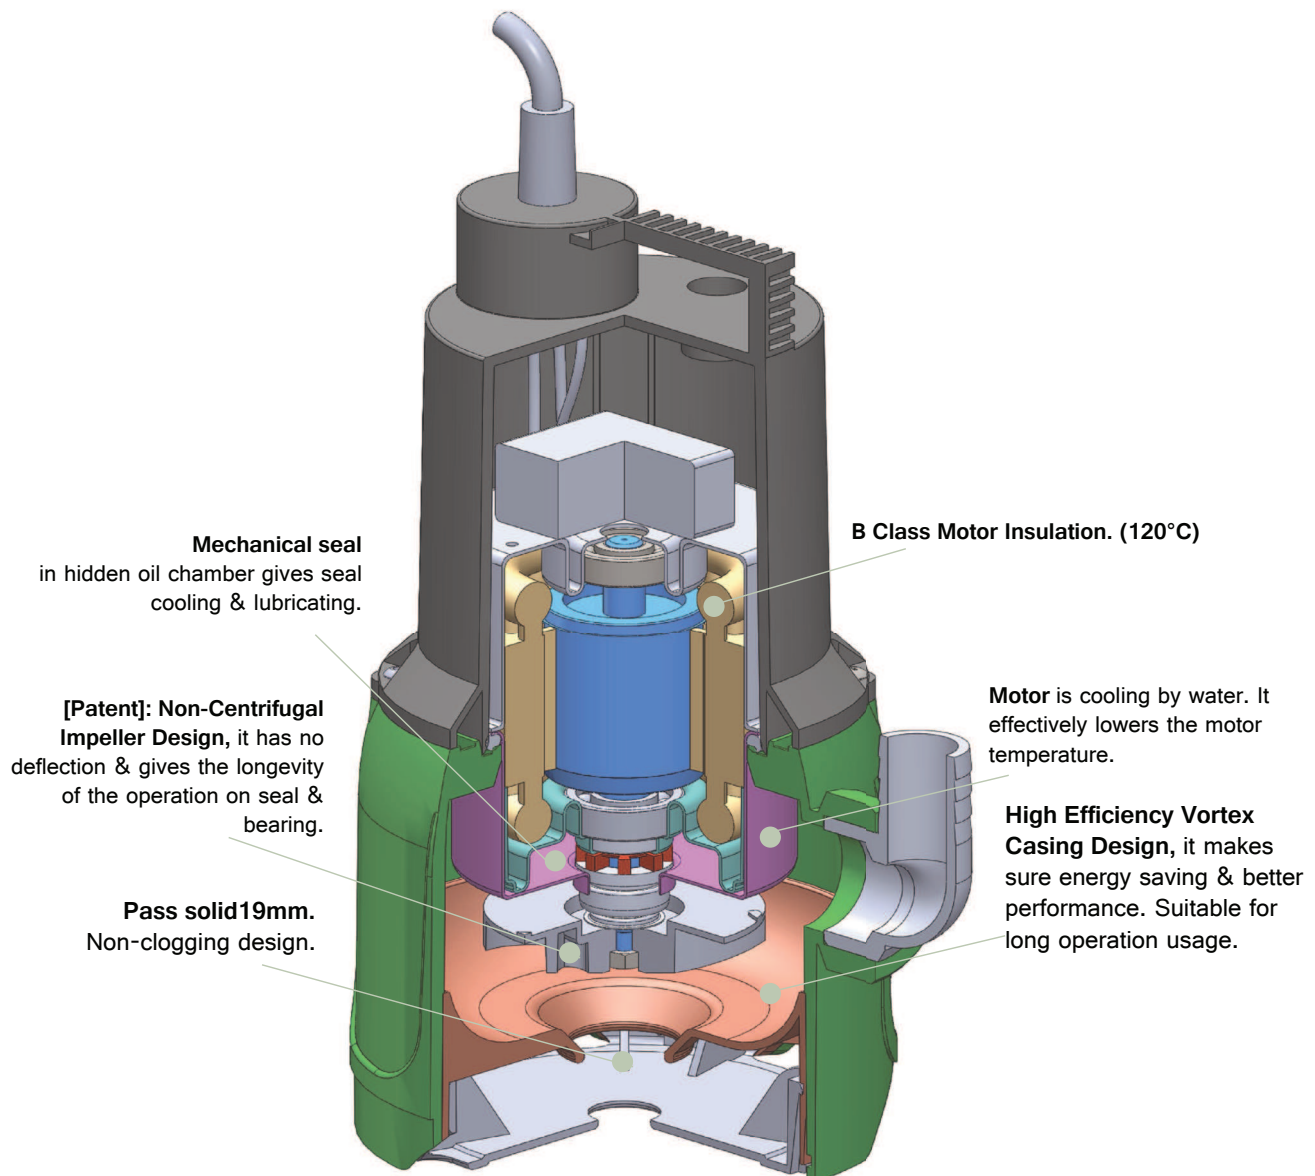

Impeller Design

TPV series
Without StrainerOptional
Float Switch

Specifications

Model No.	Output		Outlet		Solid Pass Dia(mm)	Max Flow(LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H(mm)	Weight Kg
	HP	W	mm	inch			1M	2M	3M	4M	5M			
TPS-200	1/4	200	32	1-1/4"	5	140	135	120	100	80	55	7	168 x 145 x 292	4
TPV-200	1/4	200	32	1-1/4"	19	140	135	120	100	80	55	7	168 x 145 x 292	4