

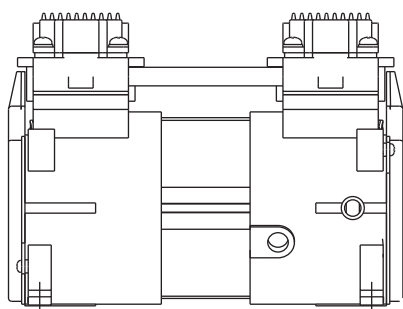


[illegible]

- | Model | Lenght (mm) | Width (mm) | Height (mm) |
|------------------------|-------------|------------|-------------|
| RND 80-140
RVD40-70 | 240 | 117 | 178 |
| RNS 70
RNS 40-60 | 155 | 117 | 178 |
| RNS 12-20 | 143 | 94 | 118 |

[illegible]

Model	Two-piston			
Description	70 RNS	60 RNS	50 RNS	40 RNS
Configuration	Vacuum pump only	Vacuum pump / compressor		
Free flow (LPM)	70	60	50	40
Max. vacuum (mmHg)	700	690	680	650
Max. pressure (Bar)	-	2	4	7
Connection	G 1/4"			
Weight	4,2 kg			
Noise level	50–53 dB			
Motor type	Capacitor start, equipped with internal thermal protection and cooling fan			
Consumption	130 W			
Voltage	230–240 V AC (50 Hz)			

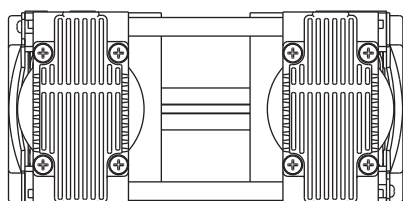

25